

PATENT
IOS9601-CIPD

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

*Continuation-in-Part Application
for
United States Letters Patent*

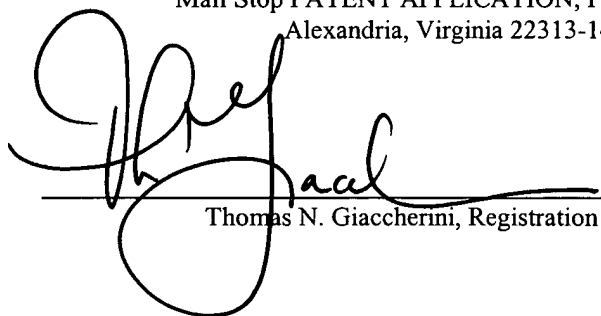
In Orbit Space Transportation & Recovery System

CERTIFICATE OF MAILING BY U.S.P.S. EXPRESS MAIL

Mailing Label Number
EJ 789 793 166 US

Date of Deposit
17 February 2004

The undersigned hereby certifies that this Patent Application is being deposited with the United States Postal Service "Express Mail Post Office to Addressee Service" in accordance with the provisions of 37 CFR Section 1.10 on the date indicated above and is addressed to The Commissioner for Patents,
Mail Stop PATENT APPLICATION, P.O. Box 1450,
Alexandria, Virginia 22313-1450.

 17 Feb 2004.
Thomas N. Giaccherini, Registration No. 31,075

Inventors:

Robert F. D'Ausilio
James R. Stuart
Frank H. Williams
Thomas N. Giaccherini

In Orbit Space Transportation & Recovery System

INTRODUCTION

The title of this Application is *In Orbit Space Transportation & Recovery System*. The Inventors are:

Robert F. D'Ausilio of 1924 Maplegrove Way, Bountiful, Utah 84010;

James R. Stuart of 1082 West Alder Street, Louisville, Colorado 80027-1046;

Frank H. Williams of 1937 East 7325 South, Salt Lake City, Utah 84121; and

Thomas N. Giaccherini, Post Office Box 1146, Carmel Valley, California 93924.

The Inventors are all Citizens of the United States of America.

**CROSS-REFERENCE TO RELATED PENDING PATENT
APPLICATIONS & CLAIMS FOR PRIORITY**

The Present Patent Application is a Non-Provisional, Continuation-in-Part Patent Application. The Applicants claim the benefit of priority under Sections 119 & 120 for any subject matter which is commonly disclosed in the Present Application and in:

5 Pending U.S. Patent Application IOS9601CIPC, Serial No. 10/755,200, filed on 9 January 2004;

Pending U.S. Patent Application IOS9601CIPB, Serial No. 10/736,887, filed on 15 December 2003;

10 Pending PCT International Patent Application IOS9601-B&C-PCT, PCT/GB04/*****, filed on 29 January 2004;

Pending PCT International Patent Application ITS9601-CIPB-PCT, PCT/US03/32748, filed on 10 November 2003;

Abandoned U.S. Patent Application ITS9601CIPA, U.S.S.N. 10/298,138, filed on 15 November 2002; and

15

Abandoned U.S. Patent Application ITS9601, U.S.S.N. 09/918,705, filed on
30 July 2001.

FIELD OF THE INVENTION

5 The present invention relates to the field of spacecraft and satellites. More particularly, this invention provides a transportation and rescue system for moving objects in space between low Earth orbits, higher orbits and beyond.

FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

None.

BACKGROUND OF THE INVENTION

Hundreds of man-made satellites are currently in orbit around the Earth. Over the next decade, governments and companies around the globe plan to launch hundreds of new spacecraft for a variety of communications, defense and remote sensing projects. The placement of satellites into Earth orbit can cost many millions of dollars. A conventional launch involves a large multi-stage, single-use rocket to lift a satellite into a geosynchronous orbit.

A general description of conventional nuclear-propulsion systems may be found in a text entitled A Critical Review of Space Nuclear Power and Propulsion, edited by Mohamed S. El-Genk, which was published by the American Institute of Physics in 1994.

The U.S. Departments of Energy and Defense and NASA developed plans for a Generic Flight System for space-based defense systems and NASA exploration missions called SP-100 in the mid-1980's. The SP-100 was designed to supply nuclear-power for military and civilian space systems. This early system was designed as a single-use power stage for a single, permanently attached payload; and was never configured for any on-orbit rendezvous, docking or servicing missions. The SP-100 is described in the SP-100 Technical Summary Report, which was prepared for the U.S. Department of Energy by the Jet Propulsion Laboratory and the California Institute of Technology in September, 1994.

Various nuclear electric propulsion systems are described in a publication entitled Nuclear Electric Propulsion, A Summary of Concepts Submitted to the NASA/DoE/DoD Nuclear Electric Propulsion Workshop, which was held in Pasadena, California on 19-22 June 1990.

The Aerospace Division of the Olin Corporation proposed a small engine for the small satellite community called the Small Upper Stage (SUS). The SUS was designed to accomplish low Earth orbit transfers, orbit circularizations and plane changes using hydrazine propulsion.

5 TRW has patented several methods and apparatus intended for the space transportation market. In U.S. Patent No. 4,471,926, Steel describes a Transfer Vehicle for Use in Conjunction with a Reusable Space Shuttle. This spacecraft has a propulsion system that uses a low-thrust bi-propellant liquid rocket engine to provide a soft, low-acceleration ascent. In U.S. Patent No. 4,575,029, Harwood and
10 Love disclose a spacecraft for transporting a payload from a space shuttle in a low altitude parking orbit to an operational orbit. In U.S. Patent No. 4,943,014, Harwood and Love reveal their "soft ride" method for changing the altitude or position of a spacecraft in orbit using a liquid bi-propellant engine.

15 In United States Patent No. 4,664,344, Harwell describes an apparatus and method of capturing an orbiting spacecraft. This device comprises a relatively small mechanical probe and fixture operated by an astronaut during a spacewalk.

In an article entitled Topaz Two Proves to Be a Gem for International Tech Transfer, contained in Technical Applications Report from Ballistic Missile Defense Organization, 1995, thermoionic reactors for space-based power generation are
20 disclosed.

Prospects for Nuclear Electric Propulsion Using Closed-Cycle Magnetohydrodynamic Energy Conversion, by R. Litchford et al. was presented at the 12th Annual Advanced Space Propulsion Workshop in Huntsville, Alabama on 3-5 April 2001.

J. Collins et al. disclose a Small Orbit Transfer Vehicle for On-Orbit Servicing and Resupply which was presented at the 15th Annual Utah State University Conference on Small Satellites at Logan, Utah, 13-16 August 2001.

5 In U.S. Patent No. 4,754,601, Minovitch discloses “a propulsion system for reusable space-based vehicles is presented wherein the propulsive working fluid is atmospheric gas.”

In U.S. Patent No. 5,260,639, De Young et al. describe “a method of supplying power to a device such as a lunar rover located on a planetary surface.”

10 In U.S. Patent No. 6,213,700, Koppel discloses a “method [which] serves to place a space vehicle, such as a satellite, on a target orbit such as the orbit adapted to normal operation of the space vehicle and starting from an elliptical initial orbit that is significantly different from, and in particular more eccentric than the target orbit.”

15 In U.S. Patent No. 6,357,700, Provitola describes “an spacecraft/airship, which uses buoyancy and thrusters to ascend into space with lifting gas as propellant or fuel for thrusters, which may be conventional thrusters or electric turbojets or ion thrusters.”

In U.S. Patent No. 5,260,639, Basuthakur et al reveal “a satellite assembly [that] is formed from any number of bus modules which have a substantially common shape and interior space volume.”

20 In U.S. Patent No. 6,478,257, Oh et al. describe “systems and methods that employ a phase change material to provide thermal control of electric propulsion devices.”

In U.S. Patent No. 3,825,211, Minovitch presents a “space vehicle [which] carries a vaporizable propellant....[E]nergy is transmitted to the vehicle while in space by a laser beam originating on the ground or some other body or satellite.”

5 In U.S. Patent No. 6 364 252, Anderman discloses a method of using dwell times in intermediate orbits to optimize orbital transfers, as well as an apparatus for satellite repair.

In U.S. Patent No. 6 669 148, Anderman et al. describes a method and apparatus for supplying orbital space platforms.

In U.S. Patent No. 5 294 079, Draznin et al. describes a space transfer vehicle.

10 The development of an in-orbit space transportation and rescue vehicle would dramatically reduce the cost of changing the orbital position of a satellite. Such a system would revolutionize the military and commercial space industries, and fill a long-felt need in the telecommunications, direct-broadcast and remote-sensing industries.

SUMMARY OF THE INVENTION

The *In Orbit Space Transportation & Recovery System* (IOSTAR™) will revolutionize the commercial space industry by providing a lower cost alternative to conventional methods of moving spacecraft in orbit. Instead of using a multi-stage
5 rocket powered by expensive and dangerous chemical fuels to lift a payload to a geosynchronous or geostationary orbit, the IOSTAR™ will rendezvous with a satellite waiting in a low Earth orbit, dock with the satellite and then gently transport it to an altitude of 22,300 miles using reliable nuclear-powered electric propulsion. The IOSTAR™ will also be available to relocate, rescue and/or retrieve satellites in need
10 of repositioning or repair, and will be capable of ferrying objects to the Moon and to the neighboring planets of our Solar System.

One embodiment of the IOSTAR™ includes a collapsible boom which may double as a radiating surface, and which expands to its fully extended position after reaching orbit. The boom is connected at one end to a tank which stores xenon which
15 fuels ion propulsion engines located at the opposite end of the boom. Docking hardware which is capable of engaging a wide variety of objects in space is coupled to the farthest end of the boom near the fuel tank. A nuclear reactor, a radiation shield, an energy converter and a large array of heat-dissipating flat-panel radiators are mounted on the boom between the reactor and a payload grasping device.

20 An appreciation of the other aims and objectives of the present invention and a more complete and comprehensive understanding of this invention may be obtained by studying the following description of a preferred embodiment and by referring to the accompanying drawings.

A BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1A & 1B present top and end views of one of the preferred embodiments of the *In Orbit Space Transportation & Recovery System* (IOSTAR™) vehicle in its fully deployed, orbital configuration.

5 Figure 2 depicts a separate service and refueling vehicle.

Figure 3 is a side view of the present invention in its fully deployed configuration.

Figure 4 reveals the present invention in a folded and collapsed configuration that may be loaded aboard a launch vehicle.

10 Figures 5, 6, 7 and 8 present side and end views of preferred embodiments of the present invention stowed aboard a launch vehicle.

Figure 9 is a block diagram of control systems installed in the IOSTAR™ spacecraft.

15 Figure 10 is a cross-sectional view of an ion propulsion engine utilized by one embodiment of the IOSTAR™ spacecraft.

Figure 11 is a cross-sectional view of a portion of one embodiment of the invention inside a launch vehicle shroud.

Figure 12 presents a diagram which provides an overview of the Brayton System, which is used as the energy converter in one embodiment of the invention.

20 Figure 13 supplies a perspective view of an alternative embodiment of the IOSTAR™.

Figure 14 is a schematic depiction of the process of conveying a satellite from a low Earth orbit to a higher orbit using the present invention.

Figure 15 illustrates a method for repositioning a satellite.

Figures 16 and 17 are comparisons of high orbit architectures for conventional and IOSTAR™ missions.

Figures 18, 19, 20 and 21 exhibit four IOSTAR™ missions.

Figures 22 and 23 show the IOSTAR™ and the International Space Station.

Figure 24 depicts a satellite having an array of antennas that could be combined with the IOSTAR to provide direct broadcast services.

Figure 25 exhibits methods of supplying controlled kinetic energy, power and information and data to satellites and celestial bodies.

A DETAILED DESCRIPTION OF PREFERRED & ALTERNATIVE EMBODIMENTS

I. Overview of Embodiments of IOSTAR™

Figures 1A and 1B reveal side and end views of one of the preferred embodiments of the In Orbit Transportation & Recovery System, or IOSTAR™ 10. IOSTAR™ is a Trade and Service Mark owned by the Assignee. IOSTAR™ is a reusable spacecraft 10 which is designed primarily for orbital transportation and rescue services.

In this Specification and in the Claims that follow, the term “satellite” refers to any object in any orbit around any body, whether natural or man-made. Any object which remains above the Earth’s atmosphere for an extended time is a satellite, since it must be within the gravitational influence of the Earth or some other celestial body. A “celestial body” is any planet, moon, asteroid, comet, star, galaxy, or any other aggregation of matter. The terms “vehicle” and “spacecraft” concerns any man-made device or means used temporarily below orbital altitude, in orbit, or beyond the Earth’s atmosphere, or for travel in space; including a ship, structure, platform, machine or manufacture that may travel beyond Earth’s orbit. The term “orbit” generally means a pathway or line of movement of an object that includes any position at any point or altitude above the surface of the Earth or other celestial body which allows an object, satellite or spacecraft to move above the Earth’s surface with or without aerodynamic lift, up to a distance which is still within the Earth’s gravitational field. Orbits may include pathways around the Earth, the Moon, the Sun or any other celestial body.

In general, the term “low Earth orbit” encompasses any orbital altitude below geosynchronous or geostationary orbit. In general, the term “high Earth orbit” encompasses any orbital altitude from geosynchronous or geostationary orbit to any position above geosynchronous or geostationary orbit within the Earth’s gravitational field. In general, the term “space” refers to any position generally outside the Earth’s atmosphere. The term “object” pertains to any configuration, embodiment or manifestation physical mass or matter, including natural objects such as asteroids or MMOD’s (micro-meteoroids and orbital debris), man-made devices, or other things or items. The term “payload” encompasses any item or cargo that is carried or transported. A typical payload is a satellite, but a payload could be a load of material, supplies, equipment, or some other object. A payload could also include a human crew, and/or other living beings including plants and animals.

In one embodiment of the invention, the backbone or central skeleton of the IOSTAR™ 10 comprises a lightweight but strong, generally metallic or composite, collapsible, compressible or at least partially foldable boom 11. The boom 11 provides structural support, but is also capable of fitting inside a launch vehicle when collapsed, and then extending to its fully deployed length after launch. The launch vehicle may be a single use vehicle, or may be reusable or expendable. In a preferred embodiment of the invention, the IOSTAR™ will be lifted into orbit by the United States Space Shuttle.

In one embodiment, one end of the boom 11 is connected to an electric propulsion system 12. In general, an electric propulsion system is any means which employs electro-magnetic forces to generate thrust. In one embodiment, a tank 13 which stores propellant for the electric propulsion system 12 is connected to the boom

11 at the end opposite from the ion engines 12. In a preferred embodiment of the invention, the electric propulsion system is an ion propulsion system 12 which expels ions to produce thrust. Table One contains a list of some of the various types of electric propulsion systems that may be utilized to implement the present invention.

Table One: Electric Propulsion Alternatives.

Electrothermal

Arcjets

Resistojets

5 Electrothermal thruster

Continuous wave

Laser & Laser Ablative

Microwave heated thruster

Electromagnetic

10 Magnetoplasmdynamic thruster

Self-Field

Applied Field

Hall effect thruster

Stationary plasma thruster

15 θ -pinch thruster

Compact toroid thruster

Pulsed-inductive thruster

Coil-gun

Z-pinch discharge thruster

20 Coax gun

Pulsed-plasma thruster

Rail-gun

Mass-driverElectrostatic

Ion engine

Field emission

Other

Magnetic loop sail

Electrodynamic Tether

5 The recitation of electric propulsion alternatives in Table One is not intended to exclude any unlisted or equivalent alternatives.

 In a preferred embodiment of the invention, the ion engines 12 employ xenon ions, so the tank is filled with xenon. In an alternative embodiment, the ion propulsion system 12 includes a Hall thruster. Other embodiments of the invention
10 may employ different fuels, and may utilize multiple fuels. The invention may utilize any tank means which holds, envelopes or stores suitable propellants.

 In a preferred embodiment of the invention, the tank 13 is refillable, and may be refilled in a relatively low or zero gravity environment. One embodiment of the invention includes one or more tanks that provides the propulsion system with
15 propellant. In one embodiment of the invention, the tank may be refilled by a separate, automatic, unmanned spacecraft as shown in Figure 2. When the IOSTAR™ vehicle runs low on propellant, it will be replenished by a servicing vehicle that either transfers all its propellant and is then released; or transfers its propellant gradually and is released when empty. In one embodiment, the IOSTAR™
20 will have a lower pressure tank so that pumping is kept to a minimum or eliminated. In another alternative, the size of the lower pressure tank is smaller, and includes limited life thrusters attached to the servicing vehicle. The electric thrusters on the service vehicle can be operated at higher power than the rest of the thrusters on the

IOSTAR™ to enhance performance since the high power reduces lifetime, the thrusters are replaced with the next service vehicle. The thrusters may have a limited lifetime, and be used for a relatively small number of missions, or, may last for the entire lifetime of the IOSTAR™. The service vehicle may be equipped with application specific thrusters that are replaced with the next service vehicle.

5

Table Two contains a list of some of the propellants that may be employed to practice the present invention.

Table Two: Propellants

	Xenon
	Mercury
	Aluminum
5	Bismuth
	Krypton
	Helium
	Argon
	Production Kr-Xe mix
10	Hydrogen
	Nitrogen
	N_2+2H_2
	NH_3
	H_2O
15	NH_3
	CO_2
	N_2H_4
	CH_4
	Air
20	Lithium
	Cesium
	Indium
	Teflon

The recitation of propellant alternatives in Table Two is not intended to exclude any unlisted or equivalent alternatives.

The end of the boom 11 which holds the propellant tank 13 is equipped with reusable docking hardware 14 that is able to contact or grasp a satellite 15 or some other object in space. In one embodiment of the invention, the tank is replenishable. This docking hardware 14 may be referred to as a grasping device, and may comprise any multiple-use means for engaging an object above the Earth. Many different embodiments of the docking hardware 14 may be incorporated in the present invention. In general, the preferred embodiment of the invention is reusable, utilizes a multiple-use docking device 14, which, unlike some of the prior art, is designed for many missions over a relatively long life-time.

The docking hardware 14 may be configured to interact with a wide variety of satellites 15 or other objects above the surface of the Earth. In general, the docking hardware 14 comprises any reusable or multiple-use means which is adapted to engage a payload launch vehicle interface, or to otherwise engage an object in space. Unlike some previous equipment designed for launch into orbit, the present invention includes a grasping means 14 which is not permanently affixed or connected to a payload.

A radiator 16 is disposed generally perpendicular to the boom 11 near the ion thrusters 12. The radiator 16, which conveys a coolant through manifold 17 and fluid flow tubes 18, dissipates heat from an energy converter out to space. The energy converter is powered by a nuclear reactor 19. The radiator 16 is generally situated between the grasping device 14 and the reactor 19. In general, the radiator 16 is a pumped fluid loop. An alternative embodiment comprises a capillary pump loop

and/or heat pipes. In another alternative embodiment of the invention, the radiator 16 may be disposed along the boom 11, or a single combined radiator/boom means may be employed.

The reactor 19 generates heat through the controlled fission of nuclear fuel. This heat is then converted to electrical power. In a preferred embodiment, the reactor 19 is gas-cooled. In alternative embodiments, the reactor 19 employs a liquid-metal coolant, or some other working fluid or heat pipes. The reactor 19 is coupled to a radiation shield 20, which protects the object, payload or satellite 15 from radiation generated by the reactor 19. In one embodiment of the invention, the radiator 16 is configured to remain entirely within the protective zone of the radiation shield 20. In one embodiment, the radiation shield 20 incorporates multiple zone shielding to minimize mass. In another embodiment, the radiation shield includes a recuperator that is also employed as a gamma shield. The transport of a living payload, such as live humans, may require additional levels of shielding.

In a preferred embodiment of the invention, from 250kW to 500kW of sustained electrical power may be generated aboard an IOSTAR™, which vastly exceeds the sustained power generating capabilities of any prior man-made satellite or spacecraft. This power generation capacity is huge when compared to the power levels of conventional satellites and spacecraft, which typically operate with less than 20kW of power. This immense on-orbit power generating capacity enables the IOSTAR™ to conduct missions which are not feasible using conventional satellites. These missions include, but are not limited to, satellite inspection, monitoring, rescue, retrieval, repair, servicing, refueling and repositioning; direct communication services; in-orbit power generation for other spacecraft like the International Space

Station; and interplanetary tasks, operations or transfers that may occur well beyond Earth orbit, such as trips to the Moon, the Asteroids, or the Planets.

The reactor 19 is also coupled to an energy converter 22 which converts heat to electrical energy. In one embodiment, the energy converter 22 includes a turbine driven by fluid that is heated by the reactor 19 to produce a large amount of electrical power. The converter 22 is coupled to the boom 11, next to the radiation shield 20. An energy converter may be an direct converter, which converts heat directly to electricity. As an alternative, an energy converter may be an indirect converter, which converts thermal energy to mechanical energy, and then to electrical energy. In a preferred embodiment of the invention, the converter employs the Brayton Cycle. In alternative embodiments, the converter may be a Rankine or Stirling Cycle converter. A thermoelectric or thermionic converter may also be employed. In a preferred embodiment of the invention, a recuperator may be connected to the energy converter.

II. Details of IOSTAR™ Embodiments

Figure 3 provides a side view, where the IOSTAR™ is viewed along its side in the plane of the radiator panels 16. Figure 4 offers a view of the invention in its fully collapsed configuration, capable of being stowed in a launch vehicle shroud 24.

5 Figures 5, 6, 7 and 8 present more detailed end and cross-sectional views of the IOSTAR™ stowed in the launch vehicle shroud 24. In one preferred embodiment of the invention, the IOSTAR™ is placed in orbit using the United States Space Shuttle.

Figure 9 supplies a schematic block diagram of control systems 28 designed for a preferred embodiment of the invention. A doubly redundant set of CPUs
10 manage the many subsystems aboard the IOSTAR™, including antennas 30, docking and star cameras 32, 34, RADAR and LIDAR systems 36 for tracking objects or satellites 15, an ion thruster controller 38, and power and thrust system controls 40. These systems enable the present invention to rendezvous and dock with a satellite or object in orbit. In an alternative embodiment, the various sensors and cameras aboard
15 the IOSTAR™ may be used to conduct remote sensing missions. The block diagram also relates the CPUs to attitude sensors and controls 42, the 28VDC power system 44, the bus health and attitude control subsystems 46, 48 and an emergency blowdown thruster control 50.

Figure 10 offers a detailed schematic view of the ion propulsion system 12.
20 A mixture of helium and xenon flows from tank 13 to the ion engine 12, where ions are created by a hollow cathode and accelerated through a series of grids to provide thrust for the IOSTAR™ spacecraft.

Figure 11 reveals a cross-sectional view of one embodiment of the invention, depicting the launch vehicle shroud 24, radiators 16, manifolds 17 and energy

converter 22.

Figure 12 supplies a schematic diagram which offers an overview of the Brayton System, the energy converter 22 that is utilized in a preferred embodiment of the invention. Heat from the reactor 19 drives a turbine, which, in turn, drives an alternator and a compressor. A recuperator increases the efficiency of the system by recovering a portion of the heat from the turbine exhaust to pre-heat the working fluid. Radiators 16 expel waste heat to outer space.

Figure 13 provides a view of an alternative embodiment of the IOSTAR™ which includes radiators disposed along the boom.

III. IOSTAR™ Missions & Operations.

The present invention is different from conventional orbital systems, in that it will be capable of accomplishing many missions over a long life. Although the IOSTAR™ will be reusable, in one embodiment the entire system will be capable of being launched using a single launch vehicle, preferably the United States Space Shuttle. Other launch vehicles that are reusable or expendable may also be employed. The first implementation of the IOSTAR™ will be constructed primarily or entirely on the Earth's surface, and then will be launched into orbit. Later implementations may be partially or completely constructed in orbit. In general, the IOSTAR™ may be controlled from a terrestrial operations center, or may operated by an on-orbit controller.

In general, the invention is fully extended after launch, and is then ready for operations. A first, general mission will comprise locating a satellite already in orbit, and then grasping, moving and releasing that satellite. IOSTAR™ will be able to move spacecraft between low Earth orbits and positions in higher orbits or to other locations in our Solar System. This primary mission of moving an object in space includes transporting satellites from one position in an orbit to another, from one orbit to another, to distant locations beyond Earth orbit or from distant locations beyond Earth orbit back to Earth orbit. The IOSTAR™ may be used for missions to the Moon, to the Planets or to the asteroids. Another mission may include changing the position of a satellite so that it is purposefully de-orbited.

In general, the term "rendezvous" pertains to the approach of an IOSTAR™ to another object or objects in space. Rendezvous may or may include station-

keeping, or any contact, probing, interaction, coupling, observing or docking between an IOSTAR™ and another object.

Once the IOSTAR™ completes its rendezvous and docking with a satellite, the satellite may be transported for retrieval and/or repair. In general, the repositioning of a satellite from one location to another will involve moving the satellite along an incremental, expanding, generally spiral pathway. Figure 14 illustrates one of the basic methods of the invention. A satellite 15 is first launched using a conventional booster to a low Earth orbit of roughly 150 nautical miles. The IOSTAR™ 10 then completes a rendezvous with the satellite 15, and engages the satellite 15 with its docking hardware 14. The IOSTAR™ then gradually raises the altitude of the satellite 15 to an operational orbit by moving the payload along an incremental, expanding spiral pathway. This procedure provides substantial cost savings for delivering a spacecraft to an operational orbit compared to the conventional technique of launching spacecraft with a multi-stage rocket. In an alternative embodiment of the invention, the IOSTAR™ will be able to rendezvous with an object beyond Earth orbit. In this embodiment, the IOSTAR™ will be capable of retrieving an object or spacecraft from a remote location beyond Earth orbit.

Figure 15 depicts an orbital repositioning mission. The invention may not only be used to transport a new satellite to its destination orbit, but may also be employed to capture a satellite which has reached the end of its useful life and needs to be safely de-orbited or placed in a disposal orbit.

In general, the primary IOSTAR™ mission will involve rendezvousing and docking with a spacecraft which is already in a low Earth orbit. After docking, the IOSTAR™ will then move from a low Earth orbit to a high Earth orbit or to a position

beyond Earth orbit. As an alternative, the IOSTAR™ will first travel to a high orbit or to a position beyond Earth orbit, locate and grasp an object, and then relocate it to Earth orbit or to a different position beyond Earth orbit.

5 Figures 16 & 17 compare a conventional geosynchronous mission to an IOSTAR™ mission. In a conventional launch, a satellite reaches high orbit in seven to ten hours, but at great expense. Using IOSTAR™, the satellite takes a gradual spiral path over a 45 to 65 day period to reach high orbit, but at a much lower cost.

10 Figures 18, 19, 20 and 21 furnish generalized views of four representative IOSTAR™ missions, including in-orbit placement, in-orbit repair, recovery and retrieval and Space Station Servicing. While all the IOSTAR™ objectives and missions are too numerous to delineate in this Specification, Table Three provides a representative and illustrative list of uses for the present invention in outline form.

Table Three: Objectives & Missions

	Correct an anomalous satellite Earth orbit
	Provide mobility for a satellite in orbit
	Move a satellite in space from one geostationary orbital position to another
5	Move a satellite in space from one geosynchronous orbital position to another
	Inspect a satellite in orbit
	Repair a satellite in orbit
	Extend useful life of a satellite
	By replenishing a consumable
10	By replenishing power
	By replenishing fuel
	By replacing a battery
	By replacing a satellite component
	Reposition a satellite to a lower orbit
15	Reposition a satellite to a higher orbit
	Service a spacecraft in combination with the U.S. Space Shuttle
	Service a spacecraft in combination with the International Space Station
	Reposition a spacecraft from a low to a high orbit to realize cost savings compared to the costs of a
20	conventional launch
	Move a satellite into a disposal orbit
	Provide services to an insurer
	Salvage a spacecraft in accordance with an insurance contract
	Enable an insurer to lower launch premiums

- Obtain information about a failure of an orbiting asset or spacecraft
- Enable an insurer to lower the financial risks of a spacecraft launch
- Maintain a fleet of operating spacecraft, including United States Global Positioning Satellites
- 5 Supply on-orbit power to another spacecraft
- Move spare spacecraft from one orbital altitude or plane to another
- Provide services to a spacecraft manufacturer
- Provide services to a spacecraft user
- Provide services to a government agency
- 10 Use IOSTAR™ as a reusable upper stage of a conventional launch vehicle to reduce launch costs
- Use IOSTAR™ and a laser used for orbital debris removal
- Use laser to divert an asteroid
- Produce propellant from an asteroid
- 15 Produce propellant from water launched into orbit from Earth
- Produce propellant from a stable, storable material launched into orbit from Earth
- Process ice present on an asteroid by electrolysis to form hydrogen and oxygen
- Process carbonaceous material present on an asteroid to form a storable propellant
- Recycle satellites in space

Figures 22 and 23 portray the IOSTAR™ in combination with the International Space Station. One embodiment of the invention will be configured to provide direct communication services that include any one or two-way transmissions or emanations between or among the IOSTAR™ and terminals on or near the Earth's surface, or with other satellites or spacecraft. One example of a conventional direct communication service is a high-bandwidth transmission to consumers like DirecTV™. In general, these direct communication services will be conducted using electromagnetic, optical or any other suitable frequencies or modes of communication over a distance. In one embodiment of the invention, IOSTAR's direct communication services will be conducted using frequency bands 11 and 12. Frequency band 11 extends from 30 to 300 GigaHertz, and is also referred to by the term "millimetric waves." Frequency band 12 extends from 300 to 3000 GigaHertz or 3 TeraHertz, and is also referred to by the term decimillimetric waves. This nomenclature of frequency bands was adopted in the Radio Regulations of the International Telecommunication Union, Article 2, Section 11, Geneva; 1959.

These direct communication services will generally be enabled by IOSTAR's enormous power generating capabilities. Figure 24 is a perspective view of a satellite having an array of antennas which may be used in combination with an IOSTAR™ to provide a direct broadcast system 52. Since the IOSTAR™ can generate very high levels of electrical power compared to conventional satellites 15, it may be used to transmit direct broadcast signals at extremely high frequencies. The Ka-Band (20-30 GHz) is the highest range of radio frequencies that are currently used by commercial satellites to communicate with customers on the ground. By drawing on its massive power supply, the IOSTAR™ Direct Broadcast System will be capable of offering

regulated direct broadcast signals at frequencies of 100 GHz and beyond using high power amplifiers, such as a traveling wave tube amplifiers or grid amplifiers. This direct broadcast system may also employ and a beam-forming array or a steerable antenna to penetrate layers of the atmosphere which absorb and scatter conventional, lower power signals. In general, the present invention is capable of generating a vast amount of electrical power to provide a wide variety of direct communication services that offer direct transmissions between the present invention and terrestrial terminals. In one embodiment of the invention, direct communication services are conducted using frequency bands 11 and 12. In general, these direct communication services may be provided by the present invention utilizing any means, mechanism or phenomenon that exploits particle or electromagnetic wave transmissions, forces, fields or action at a distance, including the radio-frequency and optical spectra.

IV. Business Methods

A. Services

The present invention furnishes three general categories of services:

Providing controlled kinetic energy;

5 Generating and/or providing power; and

Sensing and/or gathering and/or supplying information or data.

These services are depicted generally in Figure 25.

Kinetic Energy

10 In this Specification and in the Claims that follow, the term “controlled kinetic energy” relates to the conversion of a fuel to mechanical energy on board a vehicle in orbit to accomplish specific tasks. The control of the kinetic energy may originate from a ground station on the Earth, from another satellite, or from another celestial body. In one embodiment, the conversion of fuel involves fission in an on board
15 nuclear reactor. The term “operating a nuclear powered vehicle in orbit” connotes a series of extended and perhaps varied missions over a relatively long vehicle lifetime which is enabled by the nuclear reactor. Examples of services pertaining to controlled kinetic energy include, but are not limited to:

Supplying controlled kinetic energy to another satellite, which may be used to move, rescue, repair, resupply, salvage or otherwise interact or impinge upon a satellite

- 5 Supplying controlled kinetic energy to transport a payload to or from a satellite or celestial body

When used in this Specification and in the Claims that follow, the delivery of a payload “to” or “from” a celestial body is intended to include delivery to an orbit around that celestial body, or delivery to or near the surface of that celestial body.

Power

In this Specification and in the Claims that follow, the term “electrical energy” relates to the generation and/or storage and/or use of a stored quantity, current or flow of electricity derived from electromagnetic forces. Examples of services pertaining to electrical energy include, but are not limited to:

Using electricity generated by an IOSTAR™ to move, rescue, repair, resupply, salvage, interact or otherwise impinge upon a satellite

Using electricity generated by an IOSTAR™ to transport a payload to or from a satellite or celestial body

The electrical energy generated on board the IOSTAR™ is generated by a turbine or some other heat conversion device. The heat is produced by the nuclear reactor.

The electrical energy from IOSTAR™ may be conveyed to another satellite using a direct connecting link like a cable, or may be beamed to another satellite or to a celestial body, including Earth, in the form of a radiated energy beam, wave or stream of particles. In an alternative embodiment, electricity may be stored aboard the IOSTAR™ in a storage device, such as a battery or a fuel cell. The battery or fuel cell may then be physically delivered to another satellite or to a celestial body. The electrical energy may be provided to one or to a plurality of customers. A number of customers may be served on a time-share basis.

Information or Data

In this Specification and in the Claims that follow, the terms “information” and “data” relate to any manifestation, form or type of intelligence, pattern, language, image, content, audio, video, communication, or any other type of sensation.

5 Examples of services pertaining to information or data include, but are not limited to:

Processing information

Sensing information

Relaying information

Measuring radiation

10 Imaging

Environmental studies

Natural resource studies

Border surveillance

Reconnaissance

15 Conveying information to another satellite or celestial body, including Earth

Direct broadcast services

Two-way telecommunications

Using sensed or received information to move, rescue, repair, resupply,
salvage, interact with or otherwise impinge upon a satellite

In this Specification and in the Claims that follow the term “processing information” is used to connote any kind or type of information or data processing, including, but not limited to, sensing, conveying, relaying, distribution, switching, transmitting, receiving, storing or computing. Sensed or received information may
5 be necessary to locate a satellite, rendezvous and then provide the required service. Sensed or received information may also be used for navigation purposes to transport a payload to another satellite or celestial body. Information services may be provided to a single customer, or to a plurality of customers.

B. Transactions

The present invention may be involved in three general categories of business transactions:

A Sale

5 A Contract for Limited Use or Lease

A Contract for Payment by Unit or Rate

Each of these transactions may involve the services described above, including providing controlled kinetic energy; generating and/or providing power; and gathering and/or supplying information or data.

10 A sale or purchase is generally a transfer of property in which full title passes to the customer. Another alternative transaction is a trade for some other goods and/or services. In accordance with this category of transaction, a government agency or private company might purchase an IOSTAR™.

15 A Contract for Limited Use is generally a license or permission to use or utilize for a predetermined purpose or time, in which less than full title is conveyed to a customer. As an example, a Contract for Limited Use may be authorize a lease of an IOSTAR™ for the time it takes to complete a particular objective or task, such as a satellite deployment or rescue, or for a defined time period, such as a month or a year.

A Contract for Payment by Unit or Rate generally requires a customer to make a payment based on agreed upon terms involving a quantity of goods or services. As examples, this type of transaction might call for a payment based on:

5 An amount of electrical power supplied from an IOSTAR™ to another satellite (in Watt-Hours or Amp-Hours).

A quantity of mass transported by an IOSTAR™ to the Space Station or to the Moon (measured in kg, or measured by the distance moved in km).

10 A change in a satellite's orbital parameter, such as, but not limited to, altitude, apogee, perigee or inclination.

15 A number of packets of data or information conveyed to a customer or some other recipient, such as programs of content conveyed to receivers on Earth by an IOSTAR™ direct broadcast service.

An illuminated power flux density originating from an IOSTAR™.

These services may be provided to a single customer, or generally simultaneously to a plurality of customers. Services may also be provided in a time-share arrangement.

C. Service Provided to Satellites and Celestial Bodies

In general, all services and transactions concerning the present invention involve another satellite or a person, receiver, terminal, building, vehicle or other
5 object on or near a celestial body, or the celestial body itself.

V. Propagated Signals

Another class of embodiments of the invention comprise propagated signals. The IOSTAR™ may be used as the source of power or information signals that are radiated to other satellites or to celestial bodies.

5

SCOPE OF THE CLAIMS

Although the present invention has been described in detail with reference to a particular, preferred embodiment and alternate embodiments, persons possessing ordinary skill in the art to which this invention pertains will appreciate that various modifications and enhancements may be made without departing from the spirit and scope of the Claims that follow. The various embodiments, implementations and applications that have been disclosed above are intended to educate the reader about particular embodiments, and are not intended to constrain the limits of the invention or the scope of the Claims. The List of Reference Characters which follows is intended to provide the reader with a convenient means of identifying elements of the invention in the Specification and Drawings. This list is not intended to delineate or narrow the scope of the Claims.

10

15

LIST OF REFERENCE CHARACTERS

- 10 *In-Orbit Space Transportation & Rescue System*, or IOSTAR™
- 11 Collapsible spacecraft boom
- 12 Electric propulsion system
- 13 Propellant tank
- 14 Grasping/Docking mechanism
- 15 Satellite or other payload or cargo
- 16 Radiator
- 17 Manifold bellows
- 18 Gas flow tubes
- 19 Nuclear reactor
- 20 Radiation shield
- 22 Energy converter
- 24 Launch vehicle
- 28 Block diagram of control systems
- 30 Antenna
- 32 Docking cameras
- 34 Star cameras
- 36 RADAR & LIDAR
- 38 Ion thruster controller
- 40 Power and thrust system controllers
- 42 Attitude sensors and controls

- 44 28 VDC charger and regulator
- 46 Bus health and status multiplexer and D/A converters
- 48 Attitude control thruster on/off control
- 50 Emergency blowdown thruster control
- 52 IOSTAR™ Direct Broadcast System